

The Slip Stitch Cable Wrap

Revised 12.30.11

Sizes

s (32-36")

m (36-40")

l (40-44")

Yarn

- 6 (7, 8) balls of Cashmere (Cachemire) Yarn by Origin (90% cashmere and 10% wool), 50g, 164yd/150m in color Noblesse

Needles

- one set of US #6 (4.0mm) needles
or size needed to obtain gauge

Notions

- needle for weaving in ends
- locking stitch markers or safety pins (approximately 20)
- 3 – 0.75" buttons

Finished Measurements

flat measurements (knit piece laid flat without sewn seams)

width: 17.5 (19.5, 21.5)"

length: 51.75 (55.0, 58.0)"

note: The sizing may appear generous, but it can be worn more or less fitted depending on how it is worn.

size shown: s

Gauge

6.25 sts = 1" and 7.5 rows = 1" in slipped stitch cable pattern

25 sts = 4" and 30" rows = 4" in slipped stitch cable pattern

Please note: To measure the gauge, cast on a multiple of 12 plus 2 sts and then measure it over 25 sts and 30 rows.

Slipped Stitch Cable Pattern (multiple of 12 plus 2)

Row 1 (WS): K2, *p10, k2, rep from * to end.

Row 2 (RS): P2, *k2, sl 1 wyib, k2 (twice), p2, rep from * to end.

Row 3 (WS): K2, *p2, sl 1 wyif, p2 (twice), k2, rep from * to end.

Row 4 (RS): P2, *k2, drop sl st to front of work, k2, pu, dropped st and knit it (twice), p2, rep from * to end.

Row 5 (WS): Rep Row 1.

Row 6 (RS): Rep Row 2.

Row 7 (WS): Rep Row 3.

Row 8 (RS): P2, *sl 2 wyib, drop sl st to front of work, sl the same 2 sts back to left-hand needle, pu dropped st and knit it, k4 (twice), p2, rep from * to end.

2x2 Rib Pattern

Row 1: *K2, P2, rep from * to last 2 sts, end K2.

Row 2: *P2, K2, rep from * to last 2 sts, end P2.

Body

CO on 110 (122,134) sts.

Work in 2x2 rib for 4 rows.

Begin slipped st cable patt.

All Sizes:

Row 1: K2, *p10, k2, rep from * to end.

Cont in slipped st cable patt for 383 (407, 431) more rows ending after Row 8. Piece should measure approximately 51.75 (55.0, 58)" from CO edge.

Work in 2x2 rib for 4 more rows.

BO all sts.


Finishing

Do not weave in ends on the seams until you have tried on the garment.

Lay rectangle flat with WS facing. Fold the ribbed edges to center of the rectangle. Lay ribbed edges together so they overlap. Sew down approximately 3" of front rib edges at the top edge of the rectangle (see diagram for more details). Sew on 3 buttons on sewn ribbed portion.

Next, seam together of the side edge 9 (10, 11)" on either side of center. Leave remaining edges unseamed to be used as armholes.

Try on wrap, and adjust seams as desired. Weave in ends. Use a pin as desired to secure fronts.

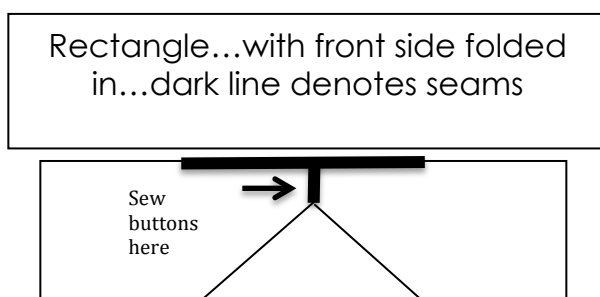

Standard Abbreviations

BO: bind off

CO: cast on

cont: continue

dec: decrease

k: knit

k2tog: knit 2 sts together

m: marker

patt: pattern

pu: pick up

pm: place marker

p: purl

p2tog: purl 2 sts together

rem: remaining

rep: repeat

RS: right side

sl: slide designated st (do not knit or purl it)

st(s): stitch(es)

St st: Stockinette Stitch (knit one row, purl one row)

WS: wrong side

wyib: with yarn in back

wyif: with yarn in front